
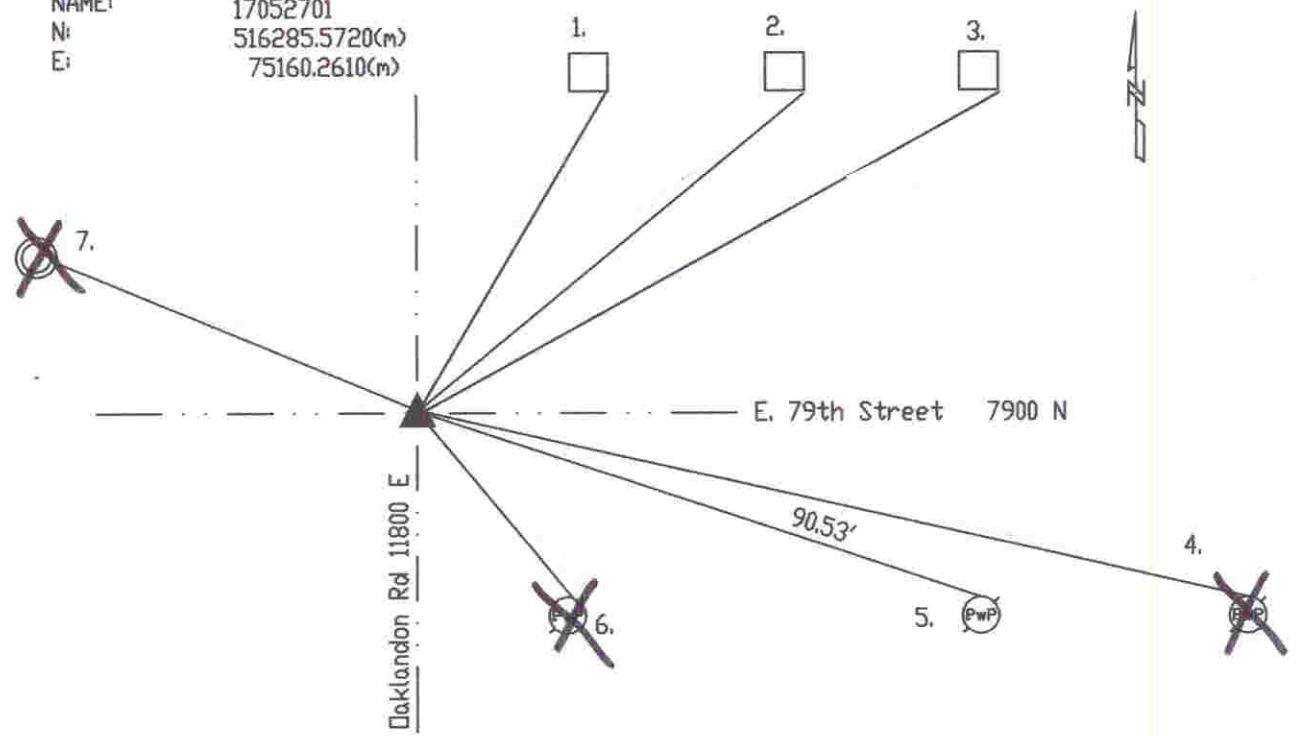


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 27 TOWNSHIP 17 RANGE 5  
DATE: -2-11-99- 05-17-05  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County 10-27-94

IN. S.P.C. E ZONE, NAD 83  
NAME: 17052701  
N: 516285.5720(m)  
E: 75160.2610(m)

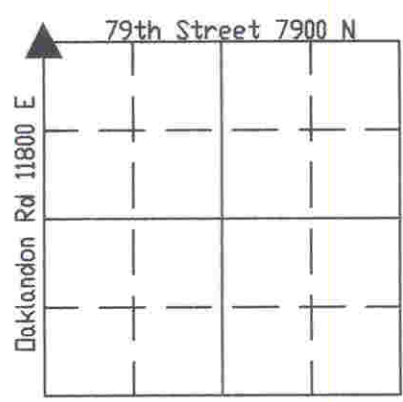

Original post set 1821 by Laughlin with witnesses: 10" beech N 56 W 27 links, 10" beech S 33 E 5 links per Marion county Atlas pg. 16. Legal Survey by Hosbrook 2-1849 per Lawrence Township Legal Survey Book pg. 11 gave distances. Legal Survey 3-1854 by Wilson per Lawrence Township Legal Survey Book pg. 14 called corner 'c' and calls it a stone. Legal Survey by Hosbrook 2-1849 per Lawrence Township Legal Survey Book pg. 15 called corner 'A' called rock. Legal Survey on pg. 16 per Lawrence Township legal Survey Book may not be applicable (section notes incorrect on plat). Legal Survey by Voorhis 10-1874 per Lawrence Township legal Survey Book pg. 35 called corner 'E' notes rock found. Legal Survey by Hosbrook 2-1849 per Lawrence Township Legal Survey Book pg. 36 called corner 'A' stone with witnesses. 12-14-73 Cripe called stone down 14". 1/2" rebar 12" long set over stone Job No# 7426 called bolt set over stone found. 8-10-79 Bruer MCSO (did not identify marker). 1979 reference to 4-28-75. Excavated 7-16-82 by Cleveland. PK nail found at surface and 0.15'N & 0.18' E of #3 rebar 10' long found 0.4' down. Rebar over highest point of stone found 1.5' down. Stone removed and Harrison set. Re-tied 2-11-99 by Wilcoxon.

HC752701

REF.	DISTANCE	DESCRIPTION
1.	47.40'	SE corner brick mailbox
2.	64.39'	SE corner brick column for address #7901
3.	84.82'	SE corner brick column
4.	<del>103.24'</del>	<del>PK nail N PwP#53-251FB 4'up</del>
5.	90.53'	Small PK nail N PwP#18-251FB
6.	<del>43.24'</del>	<del>PK nail E PwP#17-251FB 8'up</del>
7.	<del>65.23'</del>	<del>Cut 'x' E edge telephone manhole</del>